

2 Humbucker + 4 Pole 5 Way Switch + Volume + Tone : Rev E2

Switch : Oak Grigsby 4 Pole 5 Way

1 Volume

1 Tone

1: Neck*

2: Neck* + .0039mF Cap //

Bridge* : HOOP

3: Neck* // Bridge*

4: Neck* + Bridge* : OOP

5: Bridge*

Color Codes : TV Jones

Left to Right Switch Numbering

rev : E2

date : 2013-11-23

Key :

OF Outer Finish

OS Outer Start

IF Inner Finish

IS Inner Start

* Pickup internally in Series

~ Pickup internally in Parallel

+ two components in Series


// two components in Parallel

IC Inner Coil

OC Outer Coil

OOP Out Of Phase

HOOP Half Out Of Phase

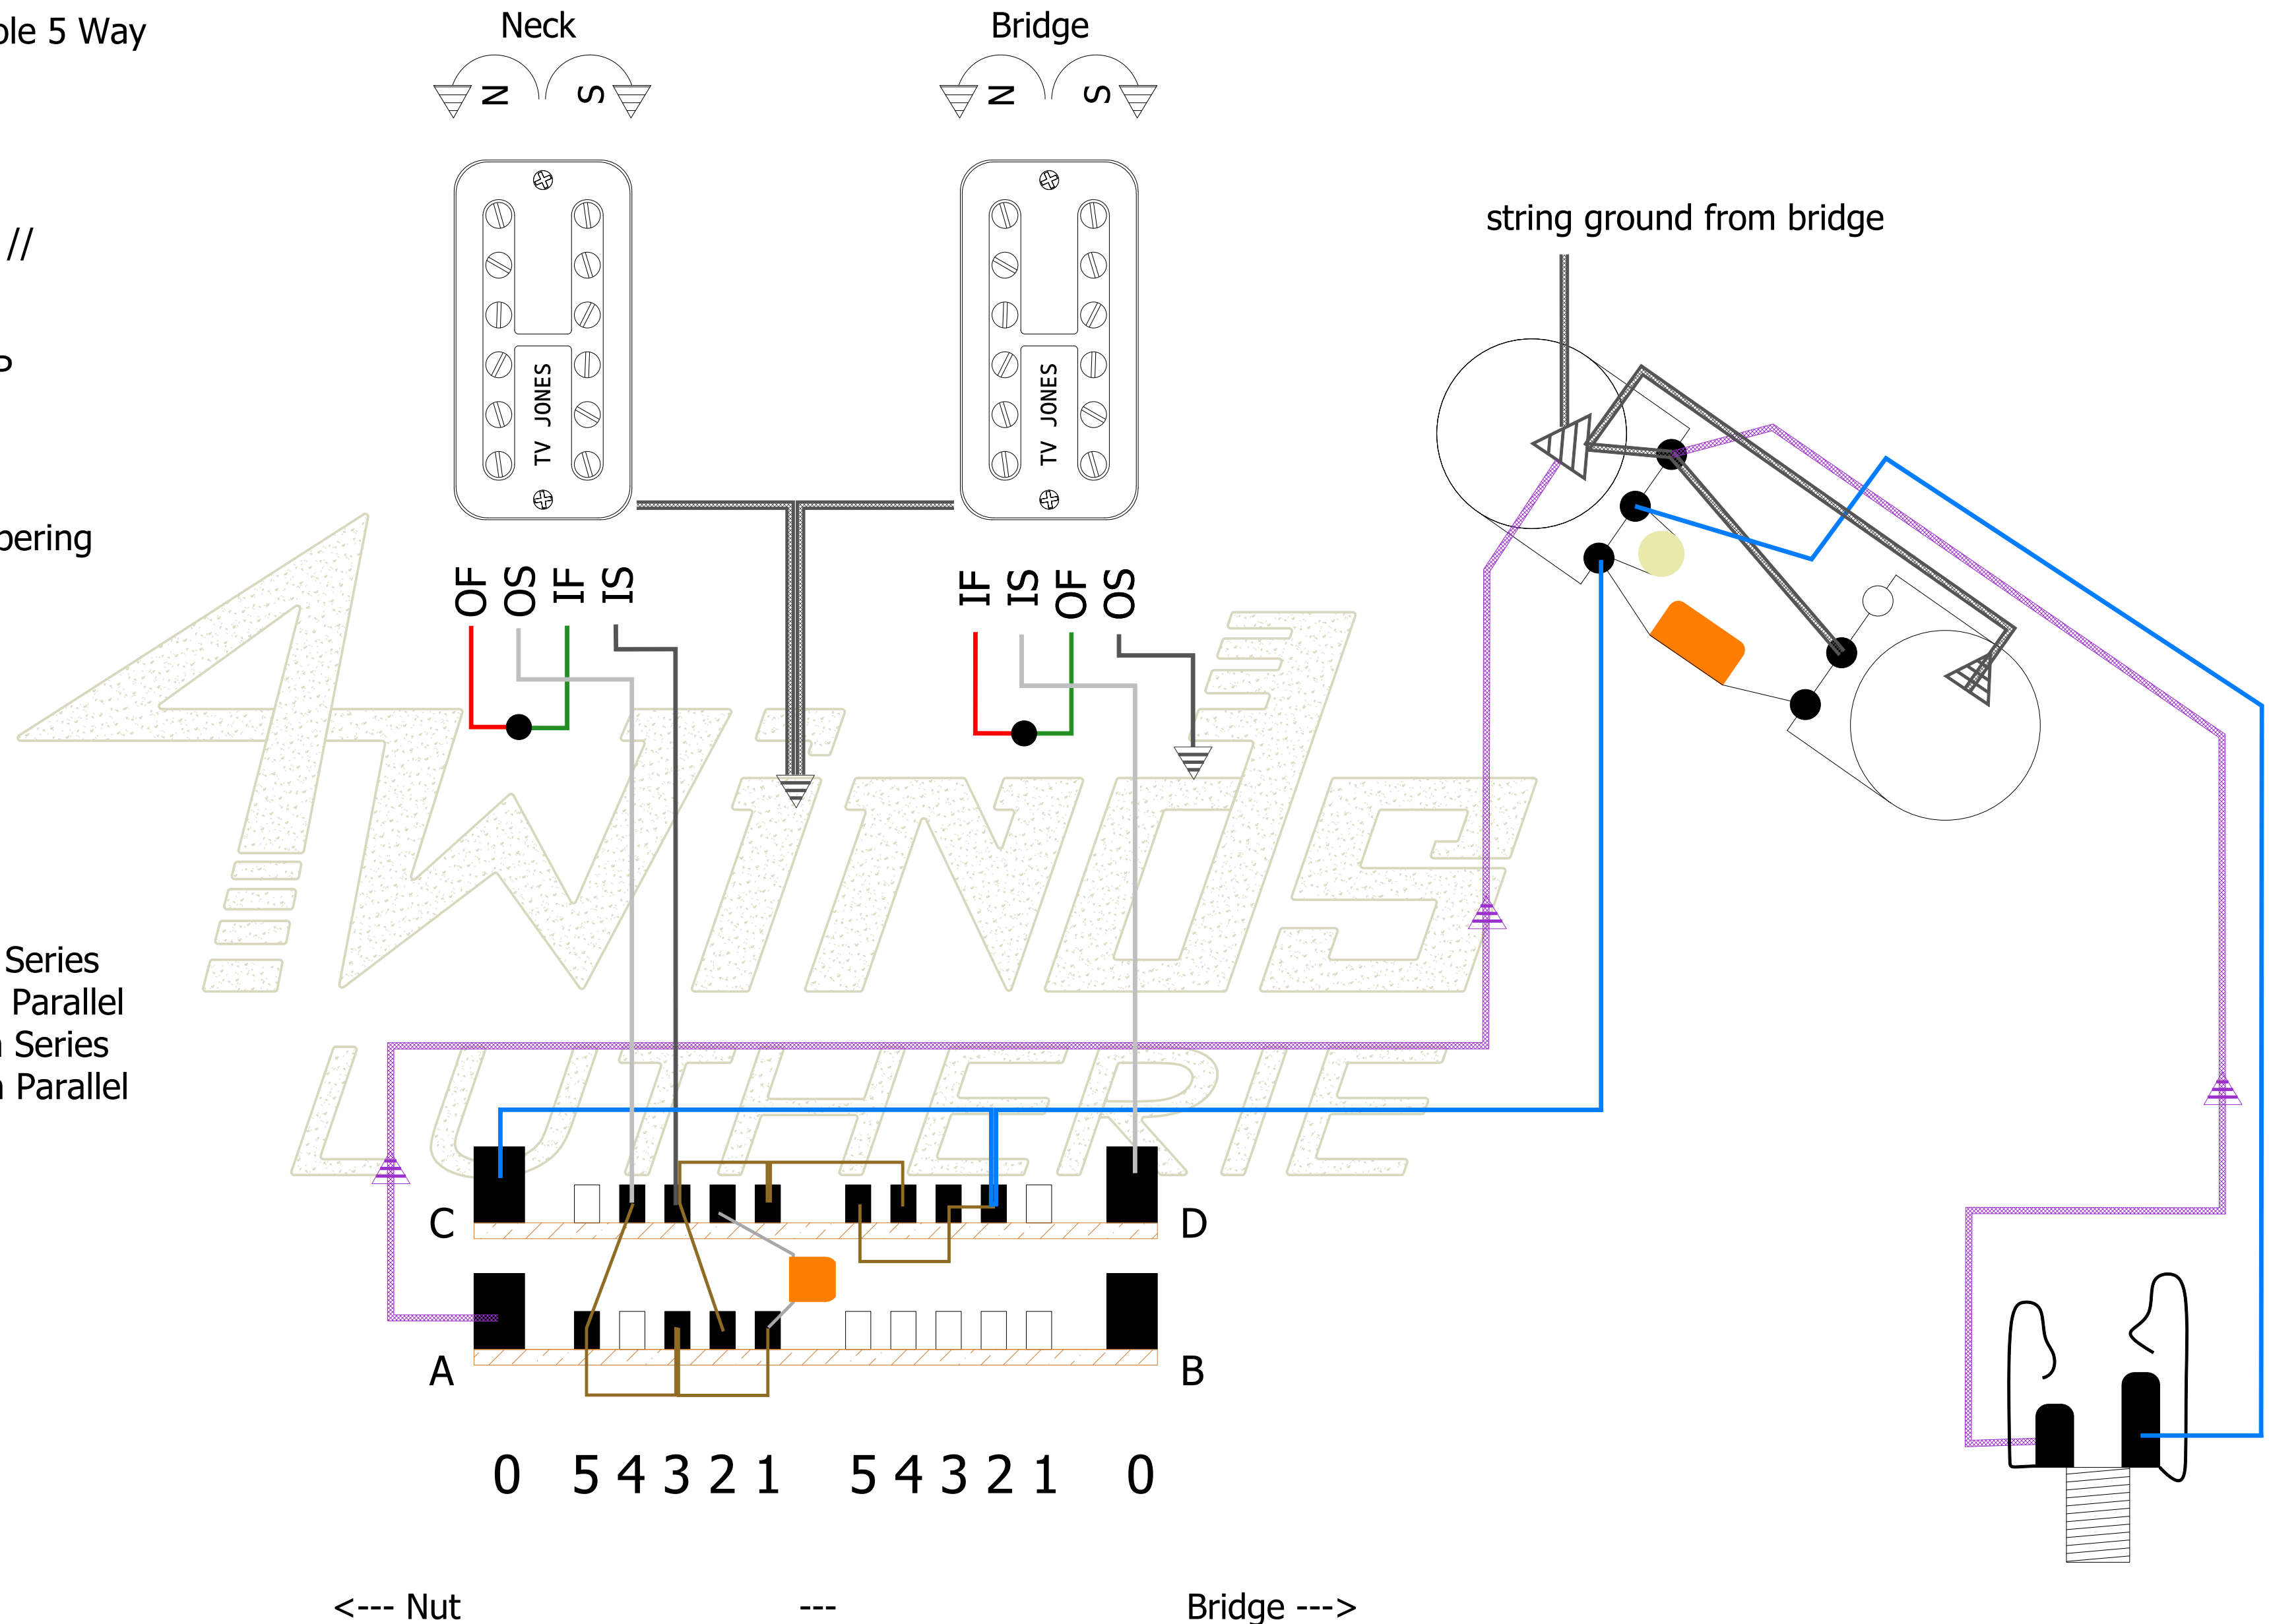

*Note 1: Although shown with 4 conductor wire, this circuit does not utilize the series join leads for switching. Therefore this scheme can be adapted to any 2 pickup layout including single coils. Pickups with baseplate or cover internally connected to the coil ground lead, such as Telecaster or P-90, must be modified to add a 3rd lead to ground the metal components separately.

*Note 2: Current TV Jones color coding may differ

4Winds

© 2013 Four Winds Lutherie | fourwindslutherie.com

licensed under CC BY-NC-SA 4.0.

To view a copy of this license, visit

<https://creativecommons.org/licenses/by-nc-sa/4.0>