

# 2 Humbucker + 4 Pole 5 Way Switch + Volume + Tone: Rev PCR

Switch : Oak Grigsby 4 Pole 5 Way

1 Volume

1 Tone

1: Neck\*

2: Neck IC // Bridge IC

3: Neck IC + Bridge IC

4: Neck OC // Bridge OC

5: Bridge\*

Color Codes : Duncan

Left to Right Switch Numbering

rev : PCR

date : 2004-04-01

Key :

OF Outer Finish

OS Outer Start

IF Inner Finish

IS Inner Start

\* Pickup internally in Series


~ Pickup internally in Parallel

+ two components in Series

// two components in Parallel

IC Inner Coil

OC Outer Coil

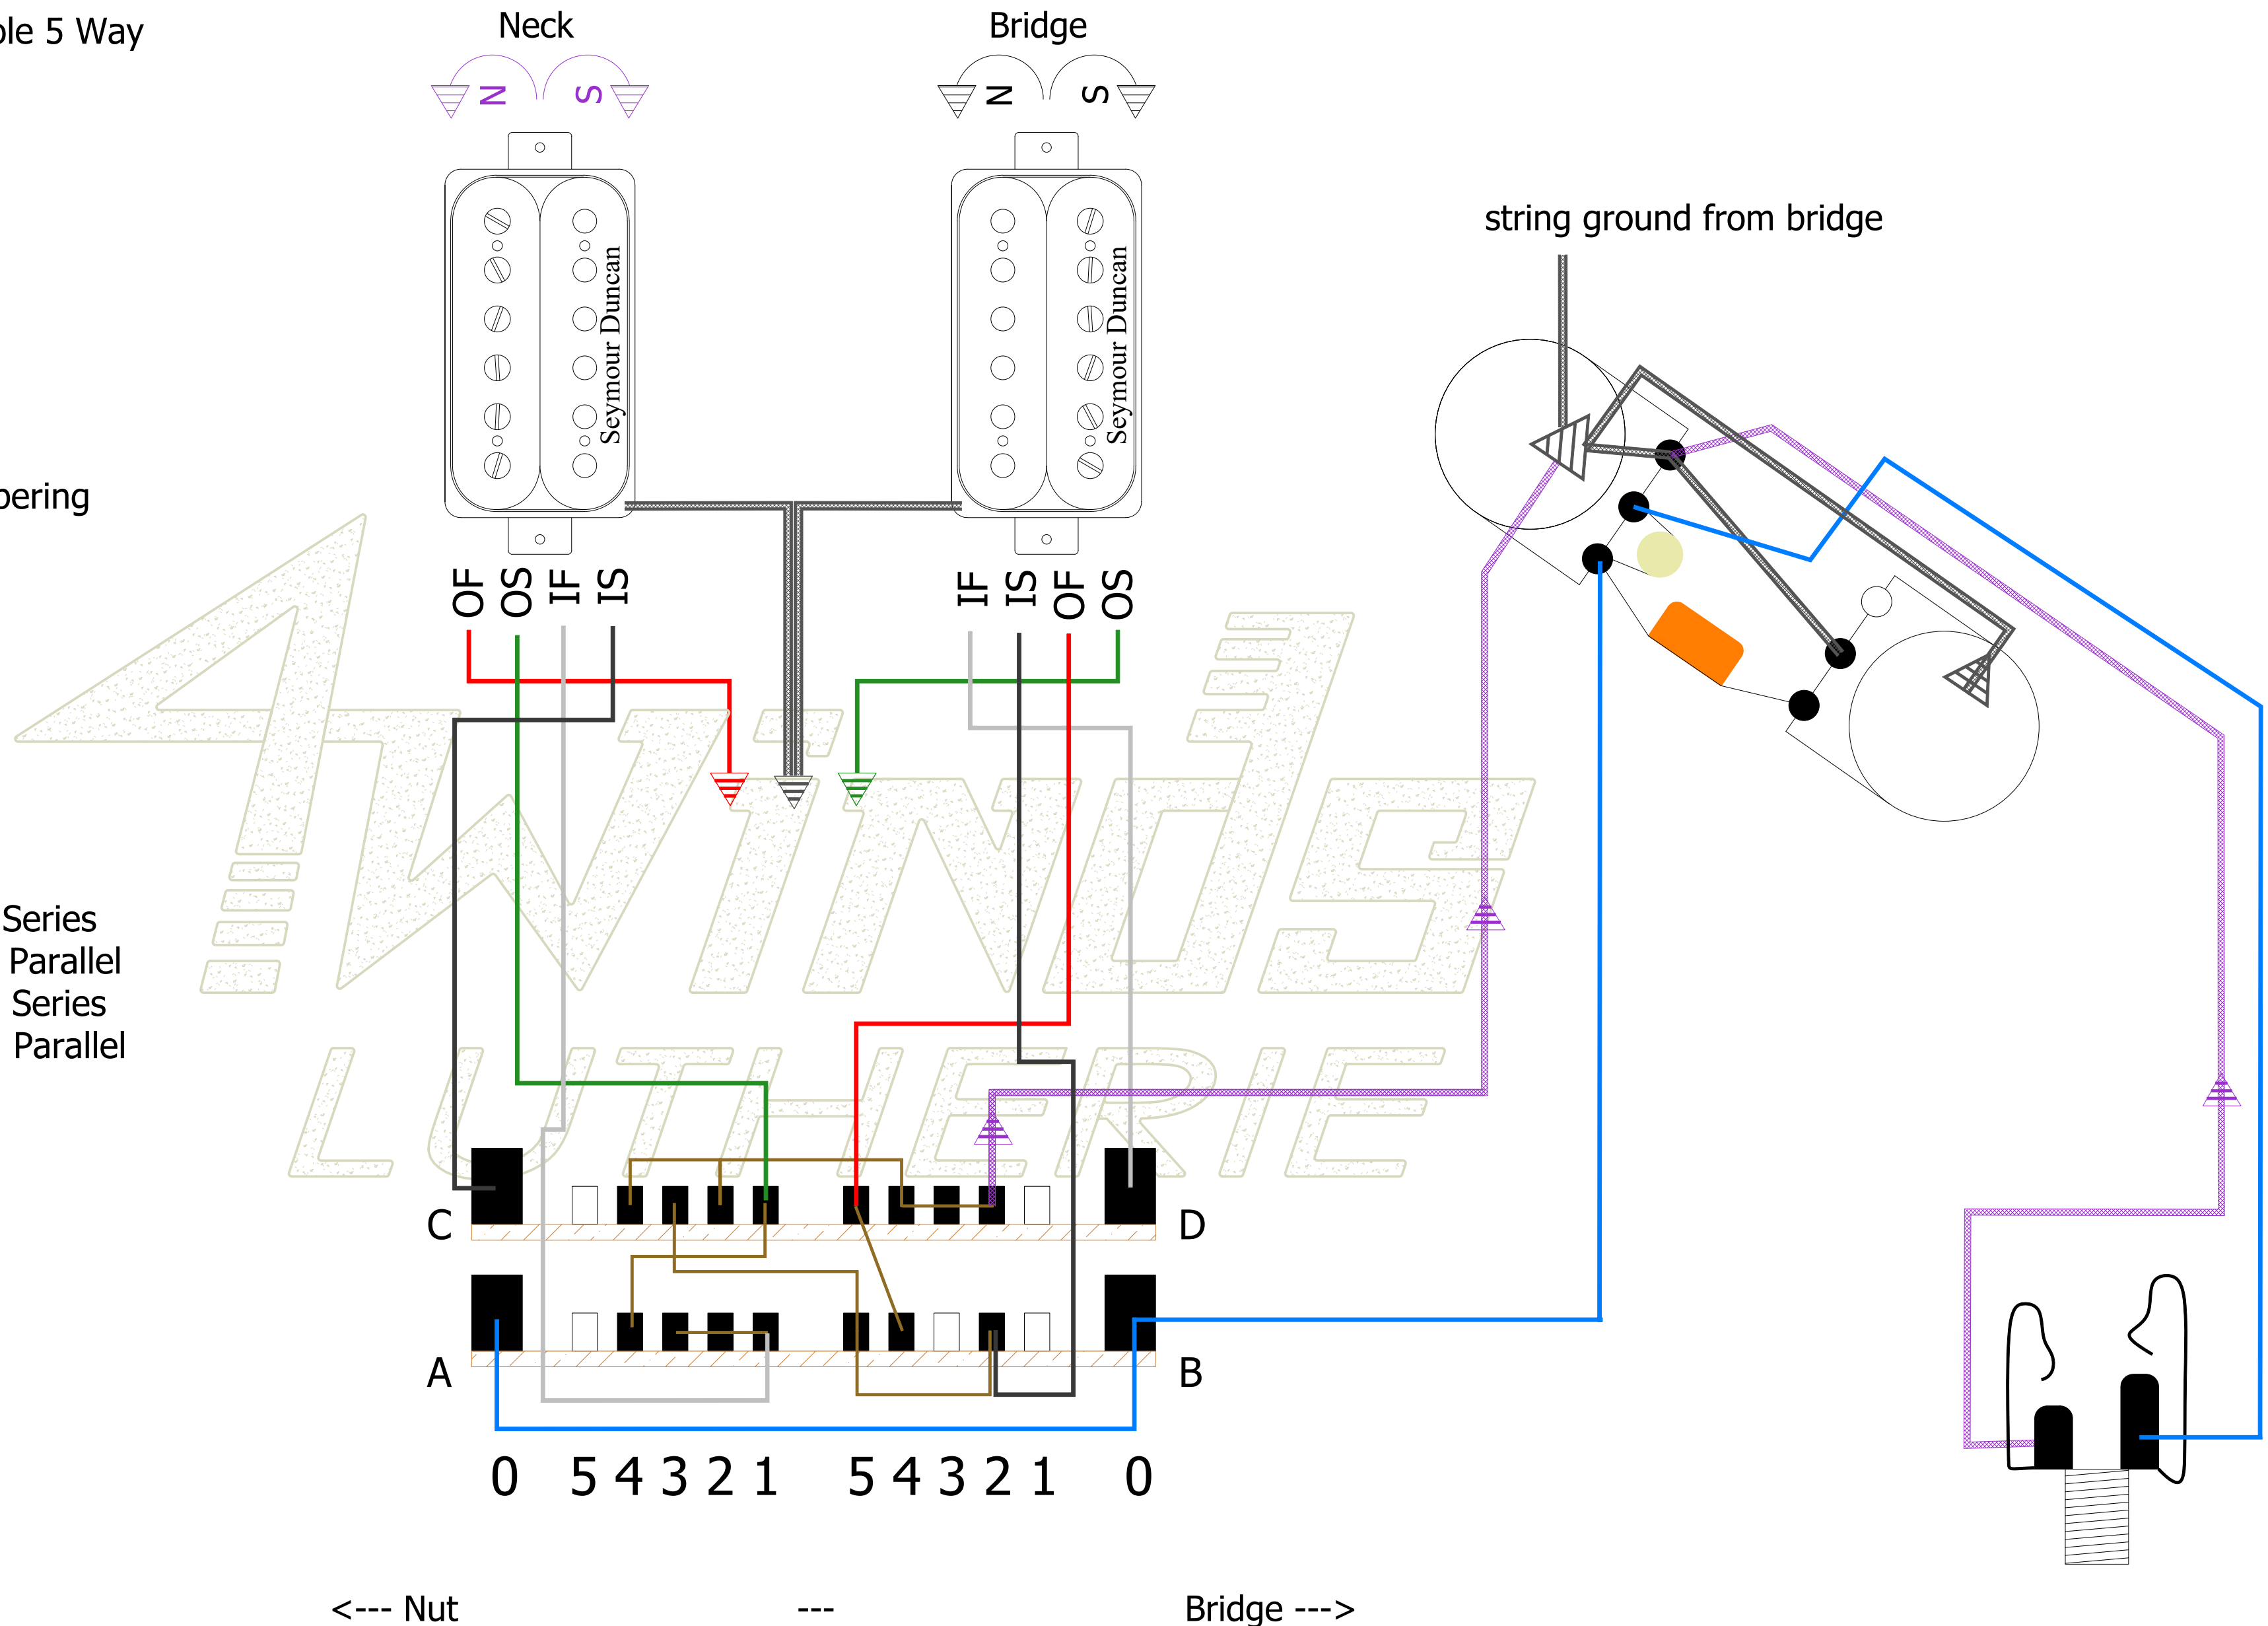

\*Note 0: This diagram ports stock mid-90's to mid-00's 5 Way Rotary sounds to a blade form factor with 4 conductor pickups

\*Note 1: Neck pickup magnet flipped 180° to achieve inner slug coil South polarity

\*Note 2: This circuit is designed for two low to medium output PAF type pickups with non-identical coils - one screw, one slug  
If used with two pickups with matching coils, ie, Dual Screw or Dual Blade pickups, P2 and P4 may sound very similar

**4Winds**

© 2004 Four Winds Lutherie | fourwindslutherie.com

licensed under CC BY-NC-SA 4.0.

To view a copy of this license, visit

<https://creativecommons.org/licenses/by-nc-sa/4.0>