

2 Humbucker + Freeway Ultra 6 Position Toggle + Volume + Tone : Rev C1

Switch: Freeway Ultra 6 position toggle
1 Vol, 1 Tone

~treble row of switch~

- 1: Neck*
- 2: Neck* // Bridge*
- 3: Bridge*

~bass row~

- 4: Neck* //
- Bridge* + .0033mF Cap: HOoP
- 5: Neck IC + Bridge IC
- 6: Neck* + Bridge* : OoP

Color Codes : Duncan



rev : C1
date : 2025-08-13

Key :

OF Outer Finish
OS Outer Start
IF Inner Finish
IS Inner Start

* Pickup internally in Series
~ Pickup internally in Parallel
+ two components in Series
// two components in Parallel

IC Inner Coil
OC Outer Coil
OOP Out Of Phase
HOOP Half Out Of Phase

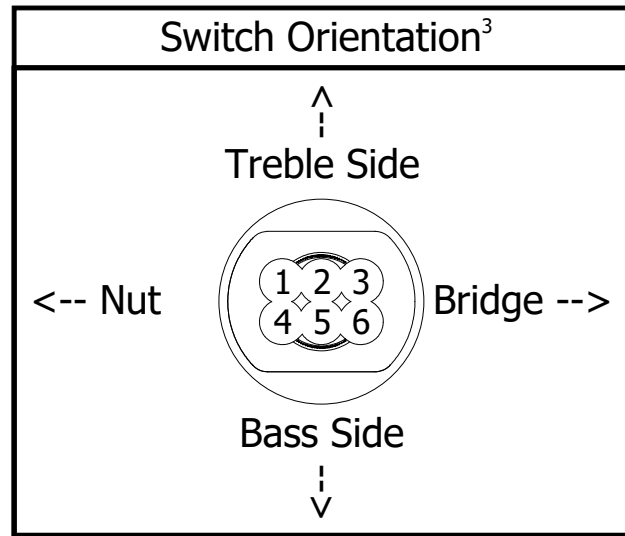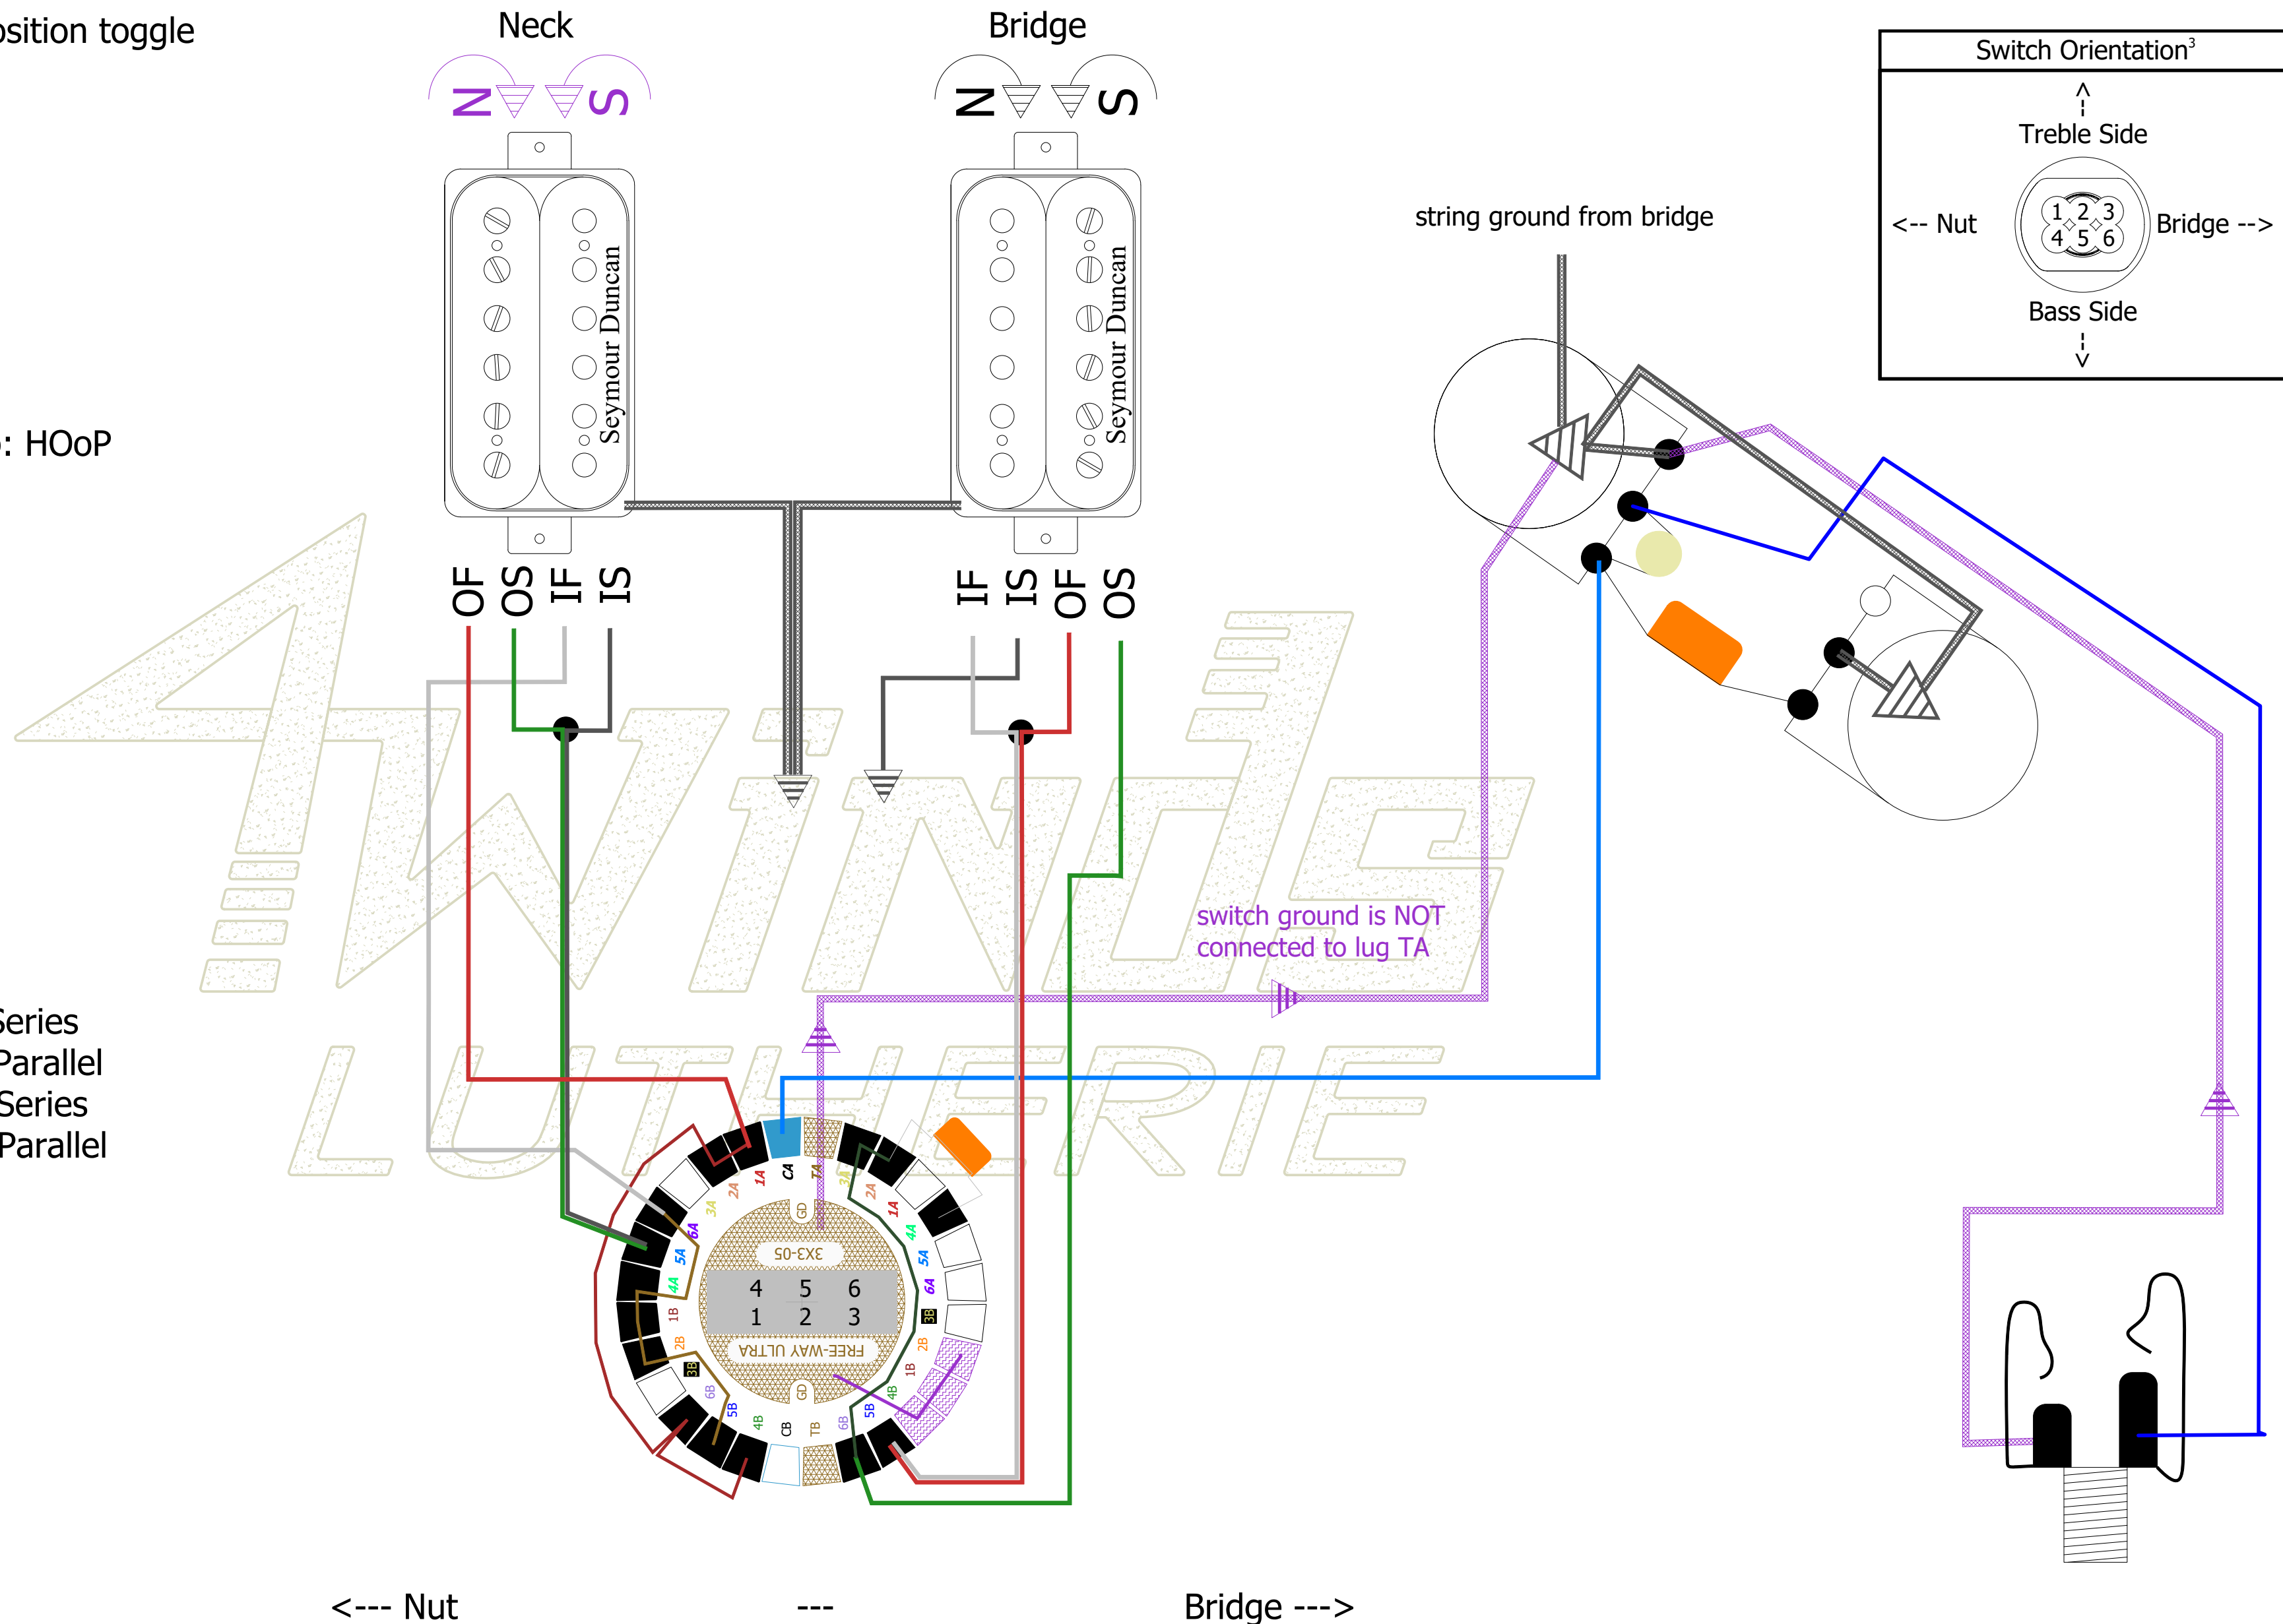

*Note 1: Neck pickup magnet flipped 180° to achieve inner slug coil South polarity

*Note 2: This circuit is designed for two low to medium output PAF type pickups with non-identical coils - one screw, one slug
If used with two pickups with matching coils, ie, Dual Screw or Dual Blade pickups, P4 may sound very similar to P3

*Note 3: In playing position, primary switch movement is left to right

4Winds

© 2025 Four Winds Lutherie | fourwindslutherie.com
licensed under CC BY-NC-SA 4.0.
To view a copy of this license, visit
<https://creativecommons.org/licenses/by-nc-sa/4.0>